




kWh	kvarh	kVAh	Active, Reactive and Apparent Energy
			4 Quadrant measurement
MID C	IEC 0.5S		Accuracy class
			Multiple connection types
CT / VT			Direct or transformer connection
			Power quality according to EN 50160
			Maximum demand
			Load profile
			Load control
			Event log
			Real-time clock
tariff 8			Multi-rate registration
			DLMS – COSEM compliance
SCADA ready	Modbus		Real time SCADA, Modbus communications protocol
3G	2G	ETHERNET	Communication
RS232	RS485		RS232 interface RS485 interface
CS			CS (20 mA current loop) interface IR (optical port) interface
			Photo-voltaic ready

Iskraemeco MT880 is a precision multi-functional meter ideally suited for large and mid-size commercial and industrial applications. It is designed to provide its users a comprehensive functionality set:

- “No power reading” option via optical port
- Voltage cut, sag and swell detection
- Internal and external power supply
- Extensive anti-tampering features
- Integrated power quality monitoring
- Multiple log books
- Photo-voltaic friendly design
- SCADA interface
- DLMS protocol for easy integration
- Enhanced TOU structure

Meter dimensions

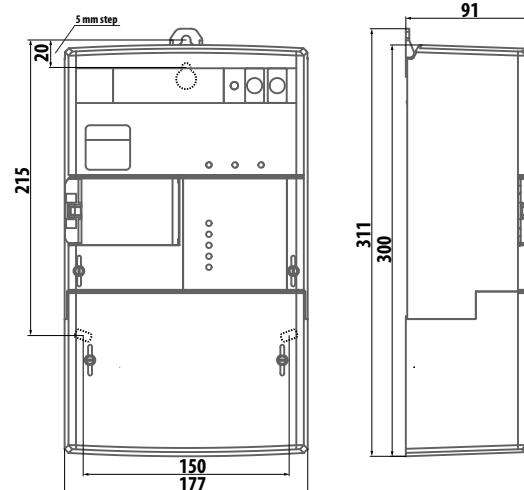

Type overview		MT880-D2..-M directly connected	MT880-T1..-M CT connected	MT880-T1..-M CT & VT connected
Network	High voltage		●	●
	Medium voltage	●	●	●
	Low voltage	●	●	
Connection type	3P4W	●	●	●
	3P3W	●	●	●
	3P3W (two systems)		●	●
Communication type – on board	RS-232	●	●	●
	RS-485	●	●	●
Communication type – module	CS – RS485	●	●	●
	2G modem – RS485	●	●	●
	3G modem – RS485	●	●	●
	MODBUS TCP/IP & RTU – Analog output	●	●	●
	Ethernet – RS485	●	●	●
Input - output options	3 OPTOMOS outputs + 5A bistable relay	●	●	
	5 inputs, 5 OPTOMOS outputs + 5A bistable relay	●	●	●
	5 inputs, 8 OPTOMOS outputs + 5A bistable relay	●	●	●

Technical specifications		MT880-D2..-M directly connected	MT880-T1..-M CT connected	MT880-T1..-M CT & VT connected		
Nominal voltage	Un	3 x 110/190 V ... 3 x 240/415 V	3 x 110/190 V ... 3 x 240/415 V	3 x 57.7/100 V ... 3 x 110/190 V		
Voltage range		0.8 – 1.15 Un				
Reference frequency		50 Hz ± 2 % or 60 Hz ± 2 %				
Current	Nominal current In	–	1 A, 1.5 A, 2 A, 5 A, 5//1 A			
	Base current Ib	5 A, 10 A	–	–		
	Maximal current Imax	120 A	Version 1: 6 A, 10 A Version 2: 20 A (In = 5A)	6 A, 10 A		
Accuracy class	Active energy	B (EN 50470 - 3) Class 1 (IEC 62053-21) Calibrated to 0,5%	B or C (EN 50470 - 3) Class 1 (IEC 62053-21) Class 0.5S (IEC 62053-22)			
	Reactive energy	Class 1 (IEC 62053-24), Class 2 (IEC 62053-23)				
	Apparent energy	Calibrated up to 1%				
Real-time clock	Accuracy	Crystal: < 5 ppm = ≤ ± 3 min./year (T = +25 °C)				
	Back-up power supply	Super-Cap: > 15 days, charging time 250 hours Super – Cap + Li battery : 10 years				
External power supply	Value	–	57.7 – 240 V AC/DC			
	Tolerance	–	0.8 – 1.15 Un			
	Frequency (only for AC)	–	50 Hz or 60 Hz			
Temperature ranges (IEC 62052-11)	Operation	-40 °C ... +70 °C				
	Storage	-40 °C ... +85 °C				
Ingress protection IEC 60529		IP 54				
Liquid Crystal Display						

Basic functionality

Measurement features

- Active (import/export) and Reactive energy (import/export), 4Q Reactive, Apparent energy & demand
- Phase and three phase energy/demand measurements
- Maximum demand with programmable integration period

Tariff functions

- Complex time-of-use (TOU)
- Tariff control via RTC or external inputs

Load profiles

- Two independent Load profiles
- Programmable and independent Load profiles period
- Eight separate Event logs

Communication

- IEC 62056-46 (DLMS) and IEC 62056-21 on optical port
- IEC 62056-46 (DLMS) on other communication interfaces
- MODBUS RTU and MODBUS TCP/IP
- Independent communication channels

Power quality

- Measurement of RMS phase current
- RMS phase voltage
- Power factor
- Network frequency
- Phase angles
- Voltage interruptions

Specifics

- Backlit LCD display
- Detection of opening main and terminal cover
- External magnetic field detector
- Photo-voltaic ready
- Secured communication channels
- Network anomalies detection

Optional

- Enhanced Power quality measurement features (Harmonic components, Total harmonic distortion factor, Voltage sags and swells)
- Communication modules (see Type overview table)
- Load control
- SMS call back functionality
- RTC (Li battery or Super-Cap)

ISKRAEMECO 

Iskraemeco, Energy Measurement and Management
4000 Kranj, Savska loka 4, Slovenia
Telephone: +386 4 206 40 00
<http://www.iskraemeco.si>, e-mail: info@iskraemeco.si